


LR6AD POWERLINE

DIMENSIONS (MM)







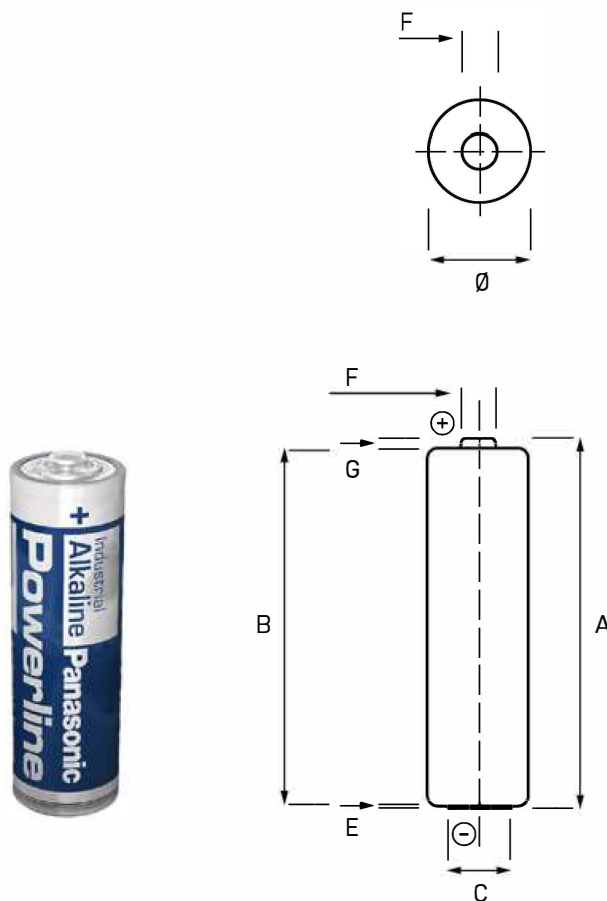


IEC dimensions	Maximum	Minimum
A	50.5	
B		49.5
C		7.0
E	0.5	
F	5.5	
G		1.0
Ø	14.5	13.7


Specifications	LR6 / M / AA / AM3 / MIGNon / MN1500 / 15A / 15AC
Made in	Belgium
Type	Alkaline Foil
Nominal voltage [V]	1.5
Electrolyte	Potassium Hydroxide
Average weight [g]	22.0
Storage temp. range	+10°C [50°F] ~ +25°C [77°F]
Operating temp. range	-20°C [-4°F] ~ +55°C [131°F]
Average Impedance	+/- 105 mΩ @ 1kHz fresh
Heavy metals	No added Mercury (Hg), Cadmium (Cd) or Lead (Pb)
Compliant to	IEC 60086-1, IEC 60086-2, IEC 60086-5 non dangerous goods regulation EU directive 2006/66/EC Nordic Ecolabel
Recommended cut off voltage	0.8V per cell (0.9V per cell for multi series usage)

LR6AD POWERLINE

TYPICAL DISCHARGE VALUES

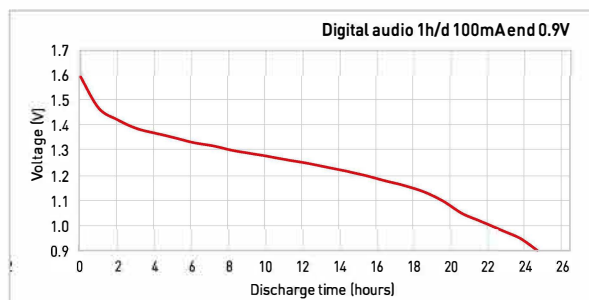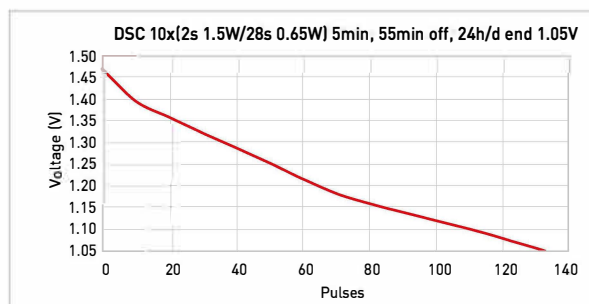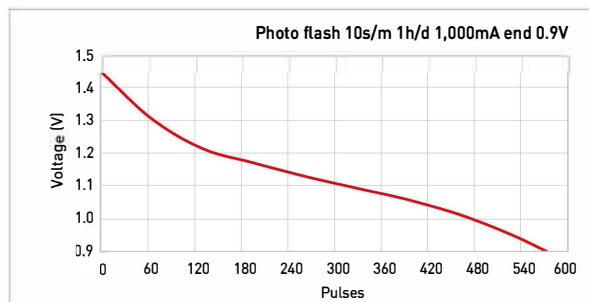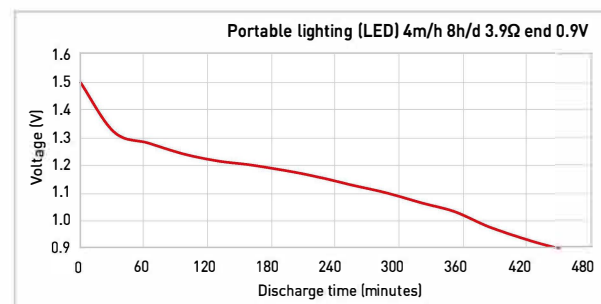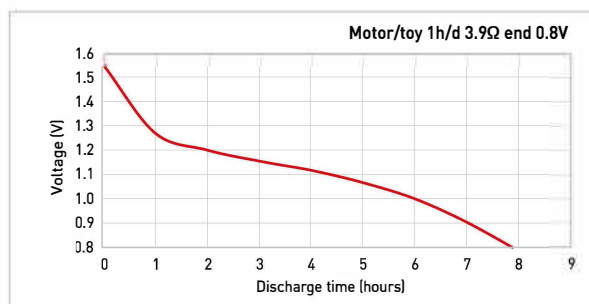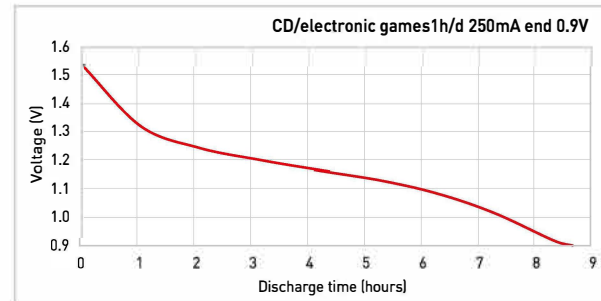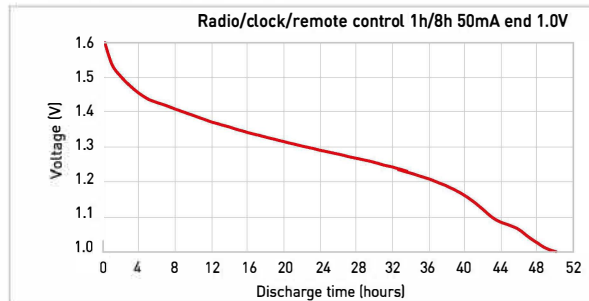

DISCHARGE TEMPERATURE CHARACTERISTICS

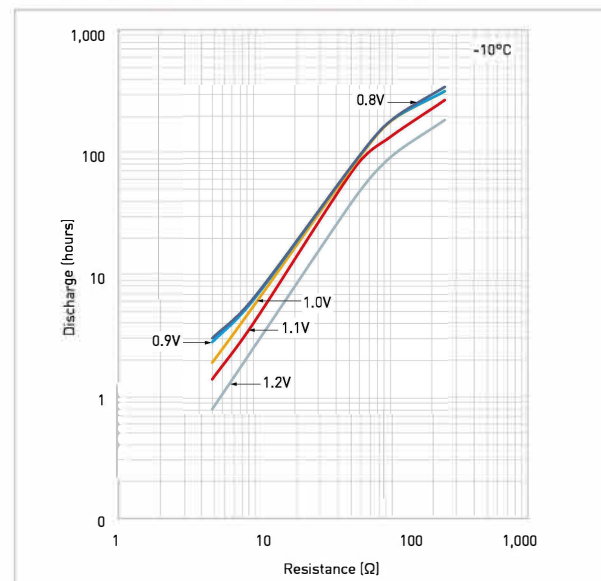

LR6AD POWERLINE

DISCHARGE TEMPERATURE CHARACTERISTICS

